FUTEK MODEL LSB352

3mV/V S-BEAM LOAD CELL W/ OVERLOAD PROTECTION IN TENSION AND COMPRESSION
(Previously L2372)

Drawing Number: FI1078-A	
INCH [mm]	R.O.= Rated Output

WIRING CODE (WC4)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
+SENSE	-SENSE	Shielded	
ORANGE	BLUE	Grounded	

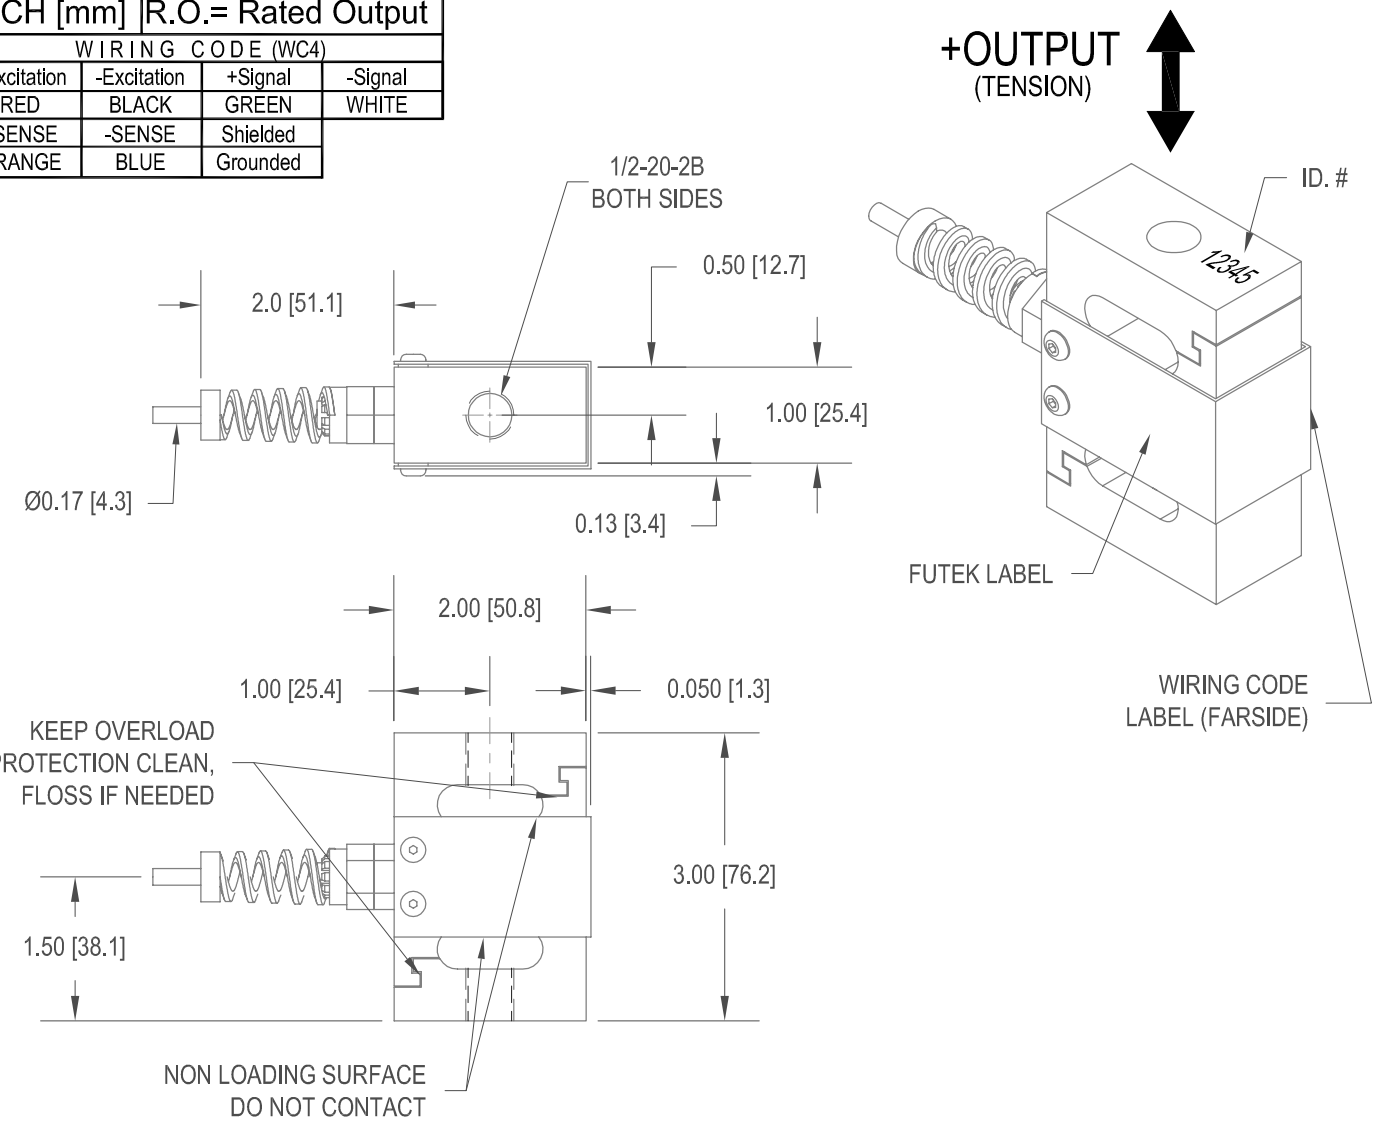

	CAPACITIES	
STK#	lb	N
FSH02100	500	2224
FSH02101	1000	4448

SPECIFICATIONS:

RATED OUTPUT	*3 mV/V nom. (Matched Output Optional)*
SAFE OVERLOAD	*500% of R.O.*
ZERO BALANCE	*±1% of R.O.*
EXCITATION (VDC OR VAC)	*18 MAX*
BRIDGE RESISTANCE	*350Ω nom.*
NONLINEARITY	*±0.05% of R.O.*
HYSTERESIS	*±0.05% of R.O.*
NONREPEATABILITY	*±0.01% of R.O.*
TEMP. SHIFT ZERO	*±0.001% of R.O./°F [0.0018% of R.O./°C]*
TEMP. SHIFT SPAN	*±0.0008% of LOAD/°F [0.0014% of LOAD/°C]*
COMPENSATED TEMP.	*60 to 160°F [15 to 72°C]*
OPERATING TEMP.	*-40 to 200°F [-40 to 93°C]*
MATERIAL	*17-4 PH S.S.*

CABLE: #28 AWG, 6 Conductor, Spiral Shielded Polyurethane Cable 5 ft [1.5 m] Long

ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE

CALIBRATION (STD)	*5 pt.TENSION; 43.575KΩ SHUNT CAL. VALUE*
CALIBRATION (AVAILABLE)	*COMPRESSION*
CALIBRATION TEST EXCITATION	*10 VDC*

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
http://www.futek.com